

ATLAS



HYDRAULIC MOTOR

Overhead Doors

230 Vac hydraulic motor for overhead door up to 15 m².



RESIDENTIAL



CONDOMINIUM



INDUSTRIAL

**SAFETY. OBSTACLE DETECTION
(MODELS WITH ANTI-TRAPPING
SYSTEM)**

**NON MECHANICAL WEARING FOR A
LONG LASTING USE**

**WIDE RANGE OF MOTORS (LOCKED,
SEMILOCKED AND REVERSIBLE WITH
HYDRAULIC LOCK)**

HIGH USAGE FACTOR



ATLAS

HYDRAULIC MOTOR

TECHNICAL CHARACTERISTICS

	KG605F	KG615	KG635I	KG640I	KG645I
Power supply (Vac/Hz)	230/50 -60				
Power consumed (W)	230				
Absorbed current (A)	1				
Capacitor (µF)	10				
Torque (Nm)	400				
Speed (m/min)	1,5		1		
Lock (B) Reversible (R) Semilocked (S)	L	R	R	S	L
Limit switches	No				
Encoder	No				
Pinion	No		Yes		
Duty cycle	Intensive use				
Protection level	IP44				
Operating temperature (°C)	-20/60				
Motor weight (kg)	15				
Packing dimensions (cm)	70x20x13				
Maximum weight of the leaf (kg)	15				

ACCESSORIES

NKGBARZ
Bar with long adaptor cube (2m)




NKGT1
Straight telescopic arm



NKGC2
Central saxo arm (Inwards opening)



NKGC1
Central saxo arm (outwards opening)

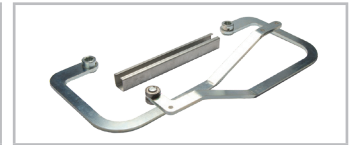

RECOMMENDED KITS

	MOTOR	GUIDE		CONTROL PANEL	RECEIVER	REMOTE CONTROL	PHOTOCELL
		KG605F	KG615	NKGT1	NKGC1	VIVO-M101	IRRE2
ATLAS1	230Vac	•		•	•	••	•
ATLAS2			•	•	•	•	••

INSTALLATION LAYOUT

