

GO
GO PLUS
GO PLUS INOX

NEW



CONNECTED ACCESS

 **ERREKA**

GO / GO PLUS / GO PLUS INOX (Stainless)

BRUSHLESS ELECTROMECHANICAL BARRIER



ERREKA GO and GO PLUS barriers are designed for access control in public and private settings, even in areas with heavy traffic. GO PLUS INOX is also available with an outer frame with a specialised stainless treatment, making it suitable for marine environments due to its quick opening and construction from highly resistant, durable materials.

For convenience and to simplify installation, the units are available for both left-hand and right-hand configurations. This configuration can be switched if necessary.

The new barriers stand out for their BRUSHLESS technology.

ULTRAQUIET BRUSHLESS MOTOR FOR HIGH PERFORMANCE

100 ÷ 240VAC EXTENDED POWER
SUPPLY RANGE FOR ENERGY SAVING
IN STANDBY MODE

AVAILABLE WITH HIGH-VISIBILITY
RED/GREEN INDICATOR LED IN THE
POST.



NEW RANGE


GO



GO PLUS



GO PLUS INOX

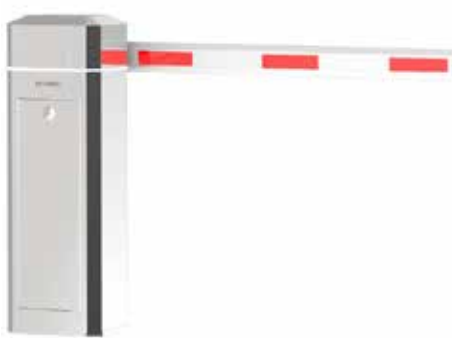

The three models feature a range of booms covering a wide range of requirements, from 4m to 8m. Various options for robust booms:

With **LED** for enhanced visibility.


Telescopic, for more efficient transport and custom adjustment.

Articulated, whenever space so requires.


Skirting, for enhanced access control.

All of them robust and easy to transport.

GO

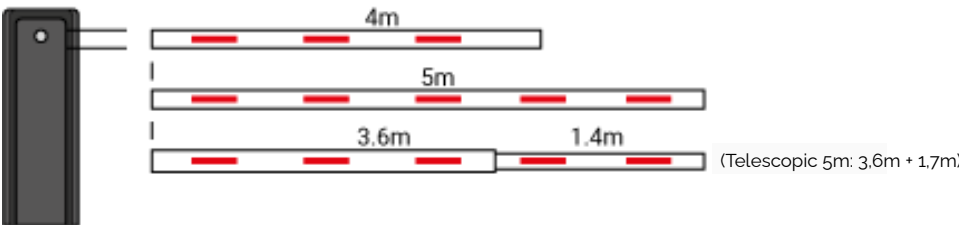

GO PLUS/ GO PLUS INOX

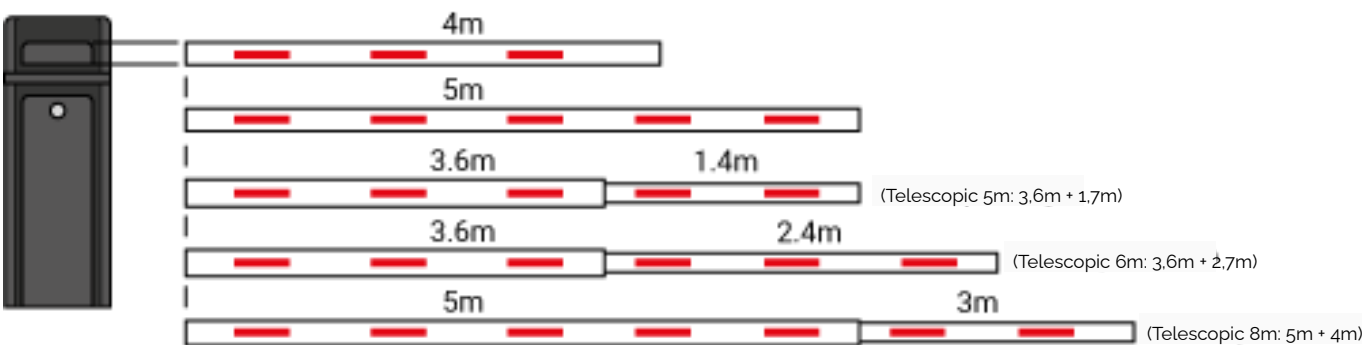

*Option to include articulated booms and skirting in the GO PLUS and GO PLUS INOX models.


GO / GO PLUS / GO PLUS INOX (Stainless)

CHARACTERISTICS

Both the GO and GO PLUS models feature an elegant design that integrates seamlessly into any space.

They stand out for their quick, easy access to internal components, which is convenient for commissioning and maintenance.

Fast, easy access to internal components - Simple disassembly of the cover to access the electronic and mechanical parts.

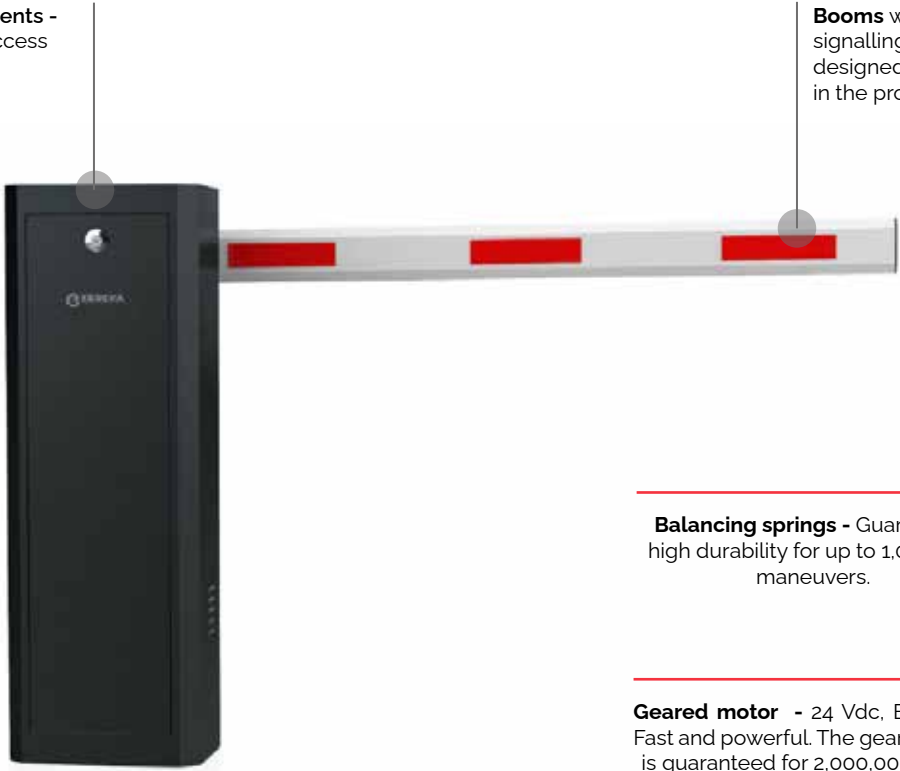

Booms with LED signalling lights designed to integrate in the profile.

Balancing springs - Guaranteed high durability for up to 1,000,000 maneuvers.

Geared motor - 24 Vdc, Brushless. Fast and powerful. The geared motor is guaranteed for 2,000,000 cycles.

BARRIER WITH LONGER SERVICE LIFE

The brushless motor offers several advantages over brushed motors, such as:

- Significant reduction in mechanical wear
- Longer service life
- Less maintenance
- Faster automated device operation
- Quieter automated device

PRECISE MOVEMENTS


The brushless motor with a digital encoder allows for a more objective interpretation of the boom's position and rotation angle, enhancing the precision of the GO & GO PLUS barrier's movements during speed reductions.



BOOM SPEED

Operating time depends on the size of the boom. The brushless motor enables the barrier to achieve an opening and closing speed of 3.5 seconds for the smallest boom (3 metres).

BOOM LENGTH	SPEED (LENGTH OF OPERATION)
3m	3.5s
4m	3.5s
5m	4.5s
6m	5s
8m	6s



GUARANTEED SAFETY: OBSTACLE DETECTION

The built-in obstacle detection makes GO & GO PLUS safe and reliable in detecting potential obstacles in the boom's path. On detecting an obstacle, the boom immediately stops and reverses its path to ensure vehicles are never trapped.




TECHNICAL DETAILS

BARRIER	GO	
	GO524BECD	GO524BECI
Power supply (Vac/Hz)	100÷240V / 50-60	
Absorbed power (W)	120	
Current (A)	0,5	
Capacitor (µF)	-	
Motor power supply (Vdc)	24Vdc Brushless	
Torque (Nm)	84	
Opening time (s)	3,5s	
Locking	yes	
Limit switch	yes	
Encoder	Digital	
Duty cycle	Intensive use	
Protection grade	IP54	
Operating temperature (oC)	-35/70	
Barrier weight (kg)	36	
Maximum boom length (m)	5	
Packaging dimensions (cm)	114 x 36,5 x 42,5	
Version	Right	Left

BOOMS		CODE
LED	Straight oval LED boom 4m	AGOo2
	Straight oval LED boom 5m	AGOo3
	Telescopic oval LED boom 5m	AGOo1
Without LED	Straight oval boom (with rubber, without LED) 4m	AGOo4
	Straight oval boom (with rubber, without LED) 5m	AGOo5
Bracket**	Fixed boom bracket	AGO15
	Moving boom bracket	AGO16

** The fixed (AGO15) or moving (AGO16) boom bracket must be installed for barriers measuring 4m or longer.

Lacquered steel body S235

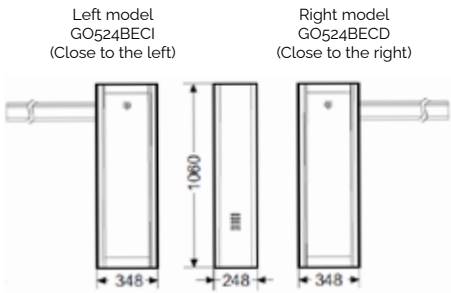

TECHNICAL DETAILS


BARRIER	GO PLUS	
	GOP24BECD	GOP24BECI
Power supply (Vac/Hz)	100÷240V / 50-60	
Absorbed power (W)	120	
Current (A)	0,5	
Capacitor (J)	-	
Motor power supply (Vdc)	24Vdc Brushless	
Torque (Nm)	125	
Opening time (s)	5(6m) – 6 (8m)	
Locking	yes	
Limit switch	yes	
Encoder	Digital	
Duty cycle	Intensive use	
Protection grade	IP54	
Operating temperature (oC)	-35/70	
Barrier weight (kg)	58	
Maximum booms length (m)	6-8*	
Packaging dimensions (cm)	112 x 40 x 42	
Version	Right	Left

* Supplied with assembled springs for a 6m boom, although the springs can be changed to extend up to 8m.

BOOMS		CODE
LED	Straight oval LED boom 4m	AGOo2
	Straight oval LED boom 5m	AGOo3
	Telescopic oval LED boom 5m	AGOo1
	Telescopic oval LED boom 6m	AGOo6
	Telescopic oval LED boom 8m	AGOo8
Without LED	Straight oval boom (with rubber, without LED) 4m	AGOo4
	Straight oval boom (with rubber, without LED) 5m	AGOo5
	Telescopic oval boom (without LED) 8m	AGOo7
Articulated	Articulated oval boom 90° 3m	AGO11
	Articulated oval boom 90° 4m (1)	AGO10
	Articulated oval boom 90° 5m (1)	AGO09
	Articulated oval boom 180° 5m (1)	AGO12
Skirting	Oval boom with skirting 3m right	AGO13
	Oval boom with skirting 4m right	AGO14
	Oval boom with skirting 3m left	AGO17
	Oval boom with skirting 4m left	AGO18
Bracket**	Fixed boom bracket	AGO15
	Moving boom bracket	AGO16

** The fixed (AGO15) or moving (AGO16) boom bracket must be installed for barriers measuring 4m or longer.
(1) Only compatible with fixed boom bracket (AGO15)

Lacquered steel body S235

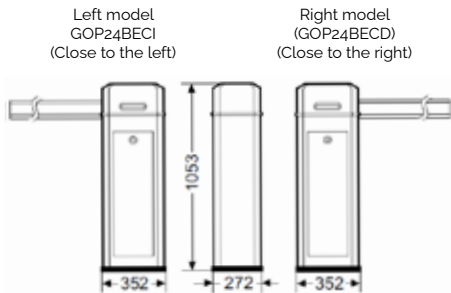


GO PLUS INOX (Stainless)

TECHNICAL DETAILS

GO PLUS INOX		
BARRIER	GOP24BECD-INX	GOP24BECI-INX
Power supply (Vac/Hz)	100÷240V / 50-60	
Absorbed power (W)	120	
Current (A)	0,5	
Capacitor (J)	-	
Motor power supply (Vdc)	24Vdc Brushless	
Torque (Nm)	125	
Opening time (s)	5(6m) – 6 (8m)	
Locking	yes	
Limit switch	yes	
Encoder	Digital	
Duty cycle	Intensive use	
Protection grade	IP54	
Operating temperature (oC)	-35/70	
Barrier weight (kg)	57	
Maximum boom length (m)	6-8*	
Packaging dimensions (cm)	112 x 40 x 42	
Version	Right	Left

Polished stainless steel body AISI304

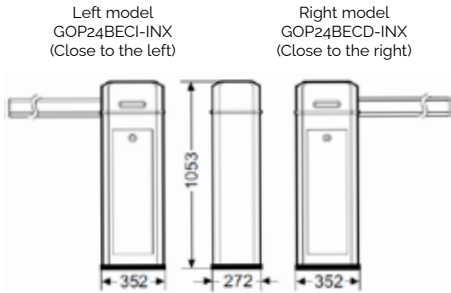





* Supplied with assembled springs for a 6m boom, although the springs can be changed to extend up to 8m.





BOOMS		CODE
LED	Telescopic oval LED boom 5m	AGO01
	Telescopic oval LED boom 6m	AGO06
	Telescopic oval LED boom 8m	AGO08
	Straight oval LED boom 4m	AGO02
	Straight oval LED boom 5m	AGO03
Without LED	Straight oval boom (with rubber, without LED) 4m	AGO04
	Straight oval boom (with rubber, without LED) 5m	AGO05
	Telescopic oval boom (without LED) 8m	AGO07
Articulated	Articulated oval boom 90° 3m	AGO11
	Articulated oval boom 90° 4m (1)	AGO10
	Articulated oval boom 90° 5m (1)	AGO09
	Articulated oval boom 180° 5m (1)	AGO12
Skirting	Oval boom with skirting 3m right	AGO13
	Oval boom with skirting 4m right	AGO14
	Oval boom with skirting 3m left	AGO17
	Oval boom with skirting 4m left	AGO18
Bracket**	Fixed boom bracket	AGO15
	Moving boom bracket	AGO16

** The fixed (AGO15) or moving (AGO16) boom bracket must be installed for barriers measuring 4m or longer.
(1) Only compatible with fixed boom bracket (AGO15)

KITS


RECOMMENDED KIT

								
		BARRIER		BOOM		RECEIVER	TRANSMITTER	PHOTOCELL
GO		GO524BECI	GO524BECD	AGO01	AGO02	IRIN2S-250	IR02	FT06
GO7		•		•		•	••	•
GO8			•	•		•	••	•
GO9		•			•	•	••	•
GO10			•		•	•	••	•

								
		BARRIER		BOOM		RECEIVER	TRANSMITTER	PHOTOCELL
GO PLUS		GOP24BECI	GOP24BCD	AGO06		IRIN2S-250	IR02	FT06
GO11		•		•		•	••	•
GO12			•	•		•	••	•


INSTALLATION DIAGRAM

- A Main power supply
- B Flashing light (in booms without LED)
- C Photocell
- D Pushbutton / key switch

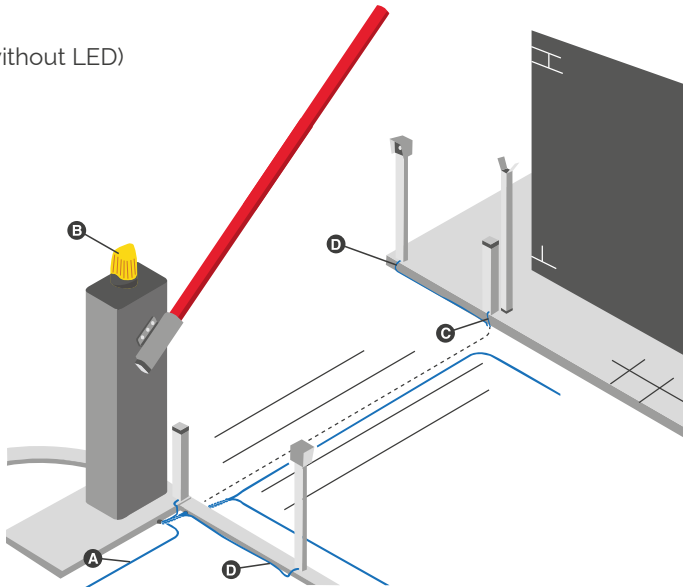

ERREKA CONNECTED ACCESS

LOCATION

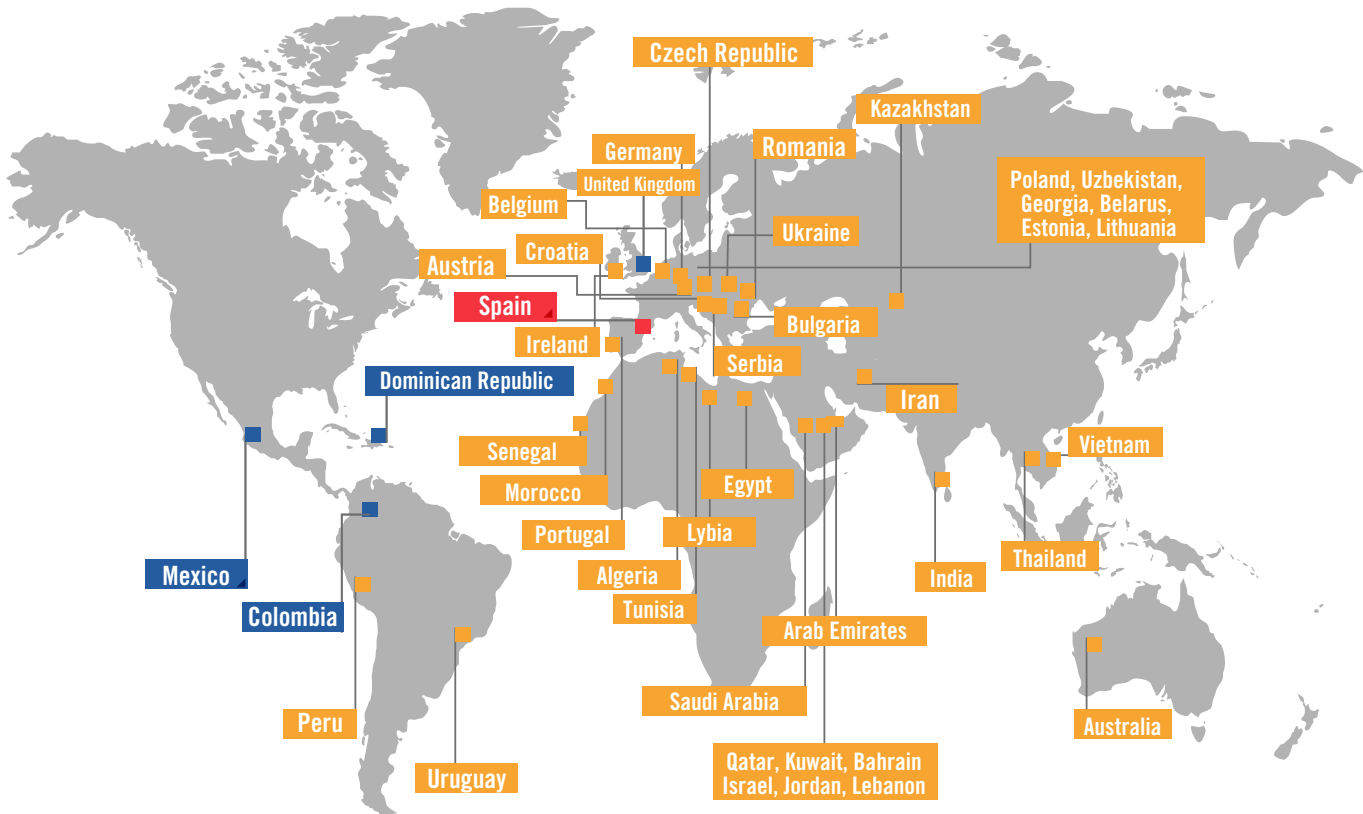

HEADQUARTERS

GRUPO ERREKA
Bº Ibarreta s/n
20577 Antzuola (Gipuzkoa) España
T. (+34) 943 78 60 09
info@erreka.com
www.erreka.com

ERREKA CONNECTED ACCESS
Polig. Ind. San Juan,
B. San Juan, 93
20570 Bergara (Gipuzkoa) España
T. (+34) 943 769 900

INTERNATIONAL BRANCHES

ERREKA MEX SA DE CV
Santa Rosa de Viterbo no. 13
Parque Industrial FINSA
El Marques, Querétaro CP: 76246
T. 442 2216078, 442 2216280
clientes@erreka.com

ERREKA DOMINICANA
Av. Independencia No 2557
Sector Jardines del sur
Santo Domingo
República Dominicana
T.+ 1 829 473 0329

ERREKA COLOMBIA SAS
Calle 18 # 28a-08
Paloquemao
Bogotá

ERREKA CONNECTED ACCESS

Polig. Ind. San Juan,
B. San Juan, 93, 20570
Bergara (Gipuzkoa) España

☎ (+34) 943 769 900

✉ info@erreka.com

🌐 www.erreka.com

