

IZARSEC



CHAIN MOTOR

Sectional Doors

Electromechanical 24 Vdc chain motor for sectional doors up to 25 m².



RESIDENTIAL



CONDOMINIUM




INDUSTRIAL

SAFETY. OBSTACLE DETECTION

ELECTROMECHANIC LIMIT SWITCHES

HIGH USAGE FACTOR

ELECTRONIC SOFT START-SOFT STOP

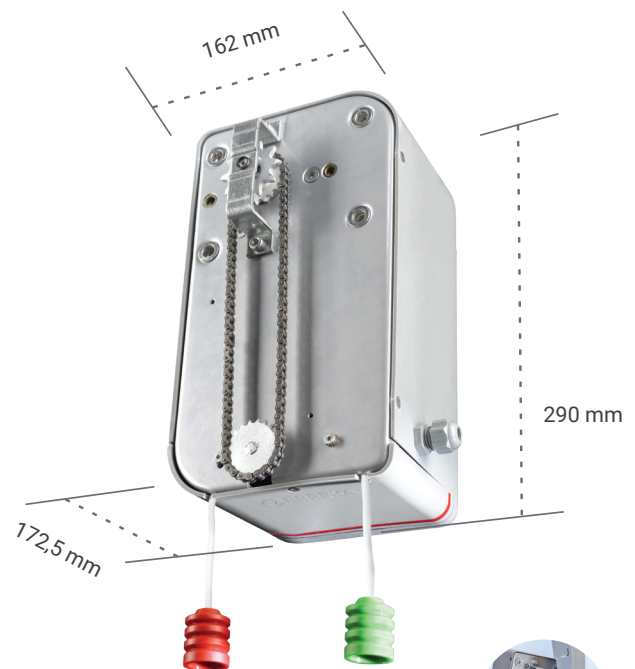

Practical unlocking system

IZARSEC

CHAIN MOTOR

TECHNICAL DATA

	IZ4DC
Power supply (Vdc)	24
Power consumed (W)	73
Absorbed current (A)	10
Capacitor (µF)	-
Maximum torque (Nm)	12 (nominal)
Output speed (rpm)	65
Lock	Yes
Limit switches	Yes
Encoder	No
Pinion	1/2x3/16-Z10
Duty cycle	Intensive use
Protection level	IP20
Operating temperature (°C)	-20 / +60
Motor weight (kg)	5
Packing dimensions	33,5X19X18
Maximum door surface (m ²)	AIZ01 (Z30)-15m ² AIZ02 (Z40)-25m ²

RECOMMENDED KITS

	MOTOR	CONTROL PANEL		SET	RECEIVER	REMOTE CONTROL
	IZ4DC	VIVO-D203	VIVO-D103	AIZ02	IRRE2-250	IR02
IZARSEC11	•	•		•	••	••
IZARSEC21			•	•	••	••

INSTALLATION SCHEME

