# SLIM20

FRAMED DOORS PROFILE

- Straightforward Installation.
- Easy assembly.

SLIMLINE DESIGN WITH A SLEEK AESTHETIC FINISH

This model is suitable for entrances that require a medium level of airtightness while maintaining a clear view of the interior, with glass as the main element.
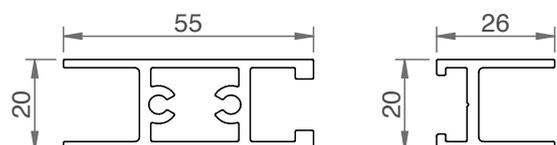
The SLIM20 model has been designed in accordance with safety standards EN 16005 and EN 16361 (safety distances).

It is a 20 mm-wide framed profile that accommodates glass up to 12 mm thick.

At the same time, its design gives entrances a modern and functional appearance without compromising strength.

The frames are assembled at 90° on an end-to-end joint, using sheet metal screws on a reinforcement wedge.

Side U-profiles are included to reduce slamming and compensate for wall imperfections.

ERREKA

SLIM20

FRAMED DOORS PROFILE

TECHNICAL FEATURES

	SLIM20
Dimensions: Depth (D) x Height (H)	Horizontal profile 20 mm x 55 mm
	Vertical profile 20 mm x 26 mm
Material	Aluminium
Standard colour	Silver
Max. door leaf size	2500 mm / 120 kg
Leaf width	Mín. 500 mm - Máx.1500 mm
Glass fastening	Framed profile
Fastening to carrier	Fastening nuts and adjustable carrier bracket
Glass thickness	10 mm - 12 mm
Mechanical manual lock	Optional floor lock ZSEG7

The new range of operators is compatible with Erreka profiles and is available in customised finishes.

	RUN10			RUN15		
	RUN10	RUN10P	RUN10T	RUN15	RUN15P	RUN15T
SLIM20	✓	✓	✓	✓	✓	✓

ACCESSORIES

TYPES OF FLOOR GUIDES

GUIA01	Outer floor guide	
KIT GUIA 2+1 S	Inner floor guide (set of 2)	
KIT EMPOTRAR	Underground guide (set)	

INSTALLATION LAYOUT