





CONDOMINIUM / INDUSTRIAL




For sliding gates up to 2500kg weight Intensive use

TORO
SLIDING GATE MOTORS

Opening the gates for you

www.erreka-automation.com



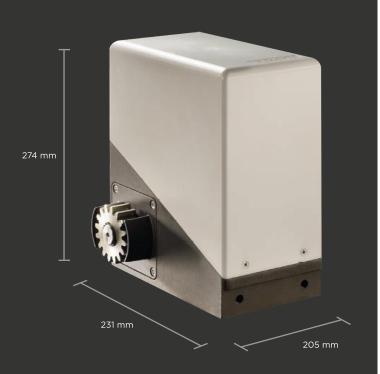



Singlephase and Threephase motors Gearbox oil bath protected Magnetic limit switch Up to 45 openings per hour

TECHNICAL DATA

	KM1800	KM2500
Power supply (Vac/Hz)	230/50	380X3/50
Absorbed power (W)	600	875
Maximum gate weight (kg)	1200-1800	2500
Torque (Nm)	45	70
Duty cycles (cycles/hour)	35	45
Speed (m/min)	9.0	
Pinion	M4-Z16	
Protection class (IP)	55	
Operating temperature (ºC)	from-20 -to 55	
Built in control board	yes	no
Operator weight (kg)	18.7	18.0
Use	Condominium / Industrial	













D: Push button or key switch


(Motor/limit switches)

E: Motor KM2500

F: Antenna



INSTALLATION LAYOUT

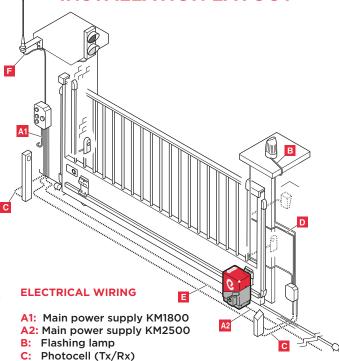

RECOMMENDED ACCESSORIES:

Control panel:

AP606 (Analogue, built-in motor mod.KM1800) VIVO-T101 (Analogue mod. KM2500)

Rack:

N2120 (2m)

Radio receiver:

Remote control:

IRRE2-250 LIF

LIRA IRIS

Photocell

FT06

Flashing lamp

LUMI









