

**HYDRAULIC OPERATOR FOR SWING GATES** 

we open the gates for you

www.erreka-automation.com




HYDRAULIC OPERATOR FOR SWING GATES



Intensive use for condominium access
Smooth opening and closing slow down
Self locking, non locking in different versions
Powerful and high resistant
Practical plug-in cable connector
Anti-vibration/silent - Fast versions
Anodized aluminium finishing

## **TECHNICAL FEATURES:**

		VUA13RFLB	VUA33FLB	VUA33RFLB	VUA43FLB	VUA43RFLB	
Power supply		220/50-60					
Absorbed power (W)		160		230			
Max. gate lengl	ht (m)	2.5	4.0	3.0	6.0	4.5	
Max. gate weig	ht (kg)	250	400	400	500	450	
Maximal power (N)		3000		7000			
Usage (cycle/h	)	45		60			
90° opening tin	ne (s)	10	24	12	34	17	
Maximum oper	ning angle (°)	(°) 110°					
Maximum travel (mm)		265		400			
Degree of protection (IP)		65					
Operating temperature (°C)		-35/+90					
Operator weigh	nt (kg)	7.5 9		.5	1	11	
Application		Residential and industrial					

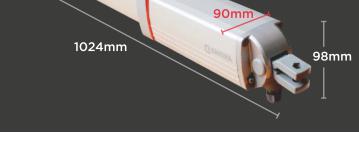

**Transmiter** 

1114mm

# RECOMMENDED ACCESSORIES

89mm

89mm

#### Control board

VIVO-M101 (1 motor) VIVO-M201 (2 motors) VIVO-M203

Receiver	
IRRE2-250	

IRRE2-250 LUNA IRIN2S-250 IRIS LIRA

# Flashing lamp

**Photocells** 

**Electric lock** 


Batteries







### **COMPLETE INSTALLATION**



#### **ELECTRICAL CONNECTIONS**

- A: Power supply
- B: Flashing lamp
- C: Photocells
- D: Push button / key switch
- E: Motor
- F: Antenne