

# OMNI

## CHAIN BARRIER

### Barrier

24 Vdc chain barrier for residential and collective use up to 20 m passage with encoder.



RESIDENTIAL



CONDOMINIUM

**HIGH USAGE FACTOR**

---

**SAFETY. OBSTACLE DETECTION**

---


**ELECTRONIC SOFT START-SOFT STOP**

---

**PROGRAMMABLE OPENING/CLOSING  
SPEED**

---

**HOUSING FOR BATTERY BACK UP  
(OPTIONAL ADN01 KIT)**

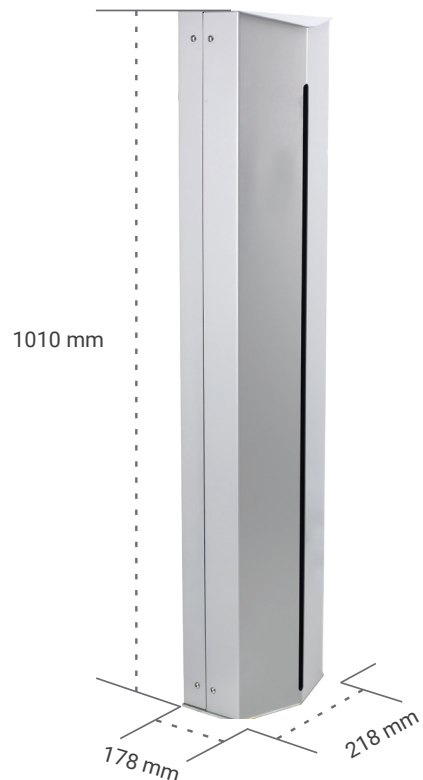

# OMNI

## CHAIN BARRIER

### TECHNICAL CHARACTERISTICS

	OMS24E Master	OM24 Slave
Power supply (Vac/Hz)	230/50	-
Power consumed (W)	170	
Absorbed current (A)	5,5	
Capacitor (µF)	-	-
Motor voltage (Vdc)	24	
Opening time (s)	10	
Lock	Yes	
Limit switches	No	
Encoder	Yes	No
Duty cycle	Intensive use	
Protection level	IP54	
Operating temperature (°C)	-20 / 60	
Motor weight (kg)	46	40
Packing dimensions (cm)	25x22x108	
Chain maximum length (m)	20 m	

### RECOMMENDED KITS

	BARRIER		CHAIN (8m)	UNDERGROUND GUIDE 2m (8m)	RECEIVER	REMOTE CONTROL	PHOTOCELL	FLASHING LAMP
	MASTER	SLAVE						
	OMS24E	OM24	AOM01A	OM02	IRRE2-250	IR02	FT06	LUMI
OMNI20	••		••••••••	•••		•••		
OMNI11	••		••••••••	•••		•••		•

### INSTALLATION LAYOUT

